

MODEL KL-50 LIFT


worldwide 
environmental

STANDARD EQUIPMENT

Operation: Electro-Hydraulic
Platform Capacity: 5,000 kgs
Lift Table Capacity: 4,000 kgs
Weight: 2,650 - 3,150 kgs
Lifting/Lowering: 55 s
Lifting Height: 2,150 mm from floor
Minimum Height: 335 mm from floor
Motor: 3kW - 230-400V/50Hz 3ph
Pneumatic Feed: 4-8 bar

The Model KL-50 Lift includes hydraulically synchronized platforms and lifting tables. For safety, an Overload-Safety Valve is included in the event of a sudden loss of pressure, and a Manual Descent Pump is included in the event of power failure.

“Dead Man” controls 24V, with front recesses and rear slip plates for wheel alignment.. The system also includes play detector plates.

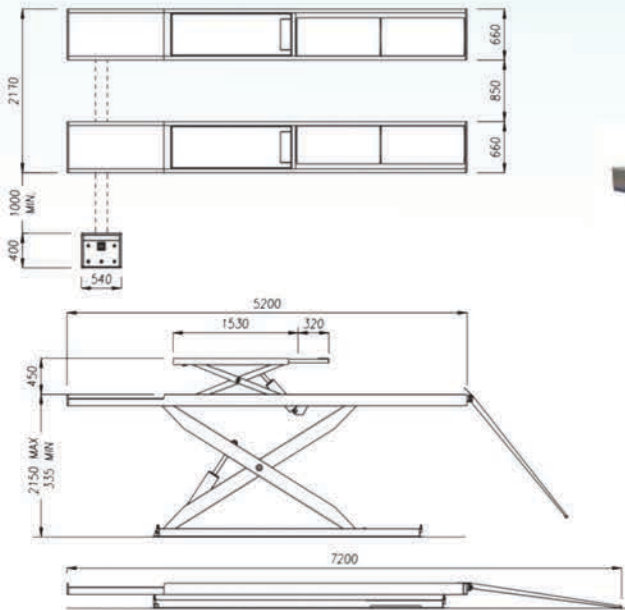

worldwide 
environmental

wep-inc.com

CORPORATE HEADQUARTERS

1100 Beacon Street
Brea, CA, USA, 92821

Telephone (International)

+1.714.990.2700

Telephone (Toll Free)

800.832.7664

Email

info@wep-inc.com